
SYSTEMS

## **CONDENSING UNITS**


## **Models**

FH Series Condensing unit for use with a remote AQS3 Series Thermostat
FHT Series Condensing unit for use with a remote TW2 Digital Display. The TW2
P.C. board is installed in the condensing unit electrical box.

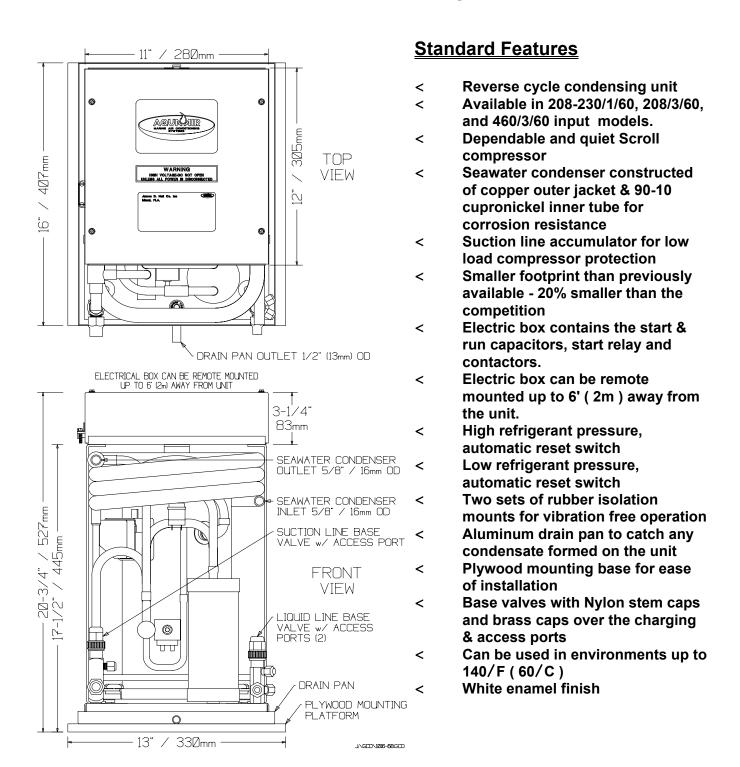

Technical Specifications			
Model	FH*- 24C	FH*- 24D	FH*-24E
Capacity BTU/H KCAL/H	24,000 6,048		
Length in/mm	16" / 407mm		
Width in/mm	13" / 330mm		
Height in/mm with electrical box without electrical box	20-3/4" / 527mm 17-1/2" / 445mm		
Weight Lbs Kgs	123 56		
Voltage / Phase / Frequency	208-230/1/60	208/3/60	460/3/60
Amps	6.3	4.9	2.5
Watts	1390	1360	1360
Suction Service Valve Connection	1/2" male 45/ flare		
Discharge Service Valve Connection	3/8" male 45/flare		
Seawater Connections, Inlet and Outlet in/mm	5/8" / 16mm OD		
Drain connection in/mm	½" / 13mm OD		

I:\wordpfct\80072.wpd

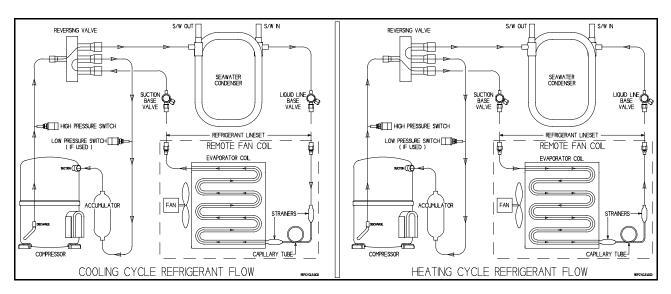

AQUA-AIR MANUFACTURING, division of the James D. Nall Co., Inc. 1050 East 9th Street, Hialeah, Florida 33010 U.S.A. Ph. 305-884-8363 Fax 305-883-8549 Email sales@aquaair.com