

# AT-DC Series Air Handlers

## Compact Units With DC "WhisperCool" Blowers



The AT-DC series of chilled water air handlers represents the new standard in marine HVAC engineering that you'll barely notice. Thanks to "WhisperCool" technology, the AT-DC series harnesses engineering refinements to eliminate the annoying "motor hum" heard from ordinary air handlers operating at very low fan speeds. Incoming alternating current is converted to drive a brushless DC internal blower motor, resulting in super-quiet and highly-efficient performance across all fan speeds.

Additional design changes in the air handlers eliminate condensate drain problems, reduce dripping condensation and standing water issues. An improved coil enhances cooling and dehumidification performance. The redesigned unit also creates easily accessible water-pressure test points for troubleshooting and maintenance.

All Marine Air air handlers use corrosion-resistant materials. They feature "positive-flow" drain pans with anti-slosh foam lining and are fully insulated against secondary condensation. Electric heat is optional.

### Key Benefits

- DC "WhisperCool" blowers are extremely quiet yet powerful enough to overcome high-static-pressure duct.
- Improved cooling and dehumidification.
- Drain pan has anti-slosh, anti-fungal foam lining.
- Vibration-isolation mounts reduce noise and vibration.
- Exposed components are insulated against secondary condensation.
- Remote air bleeder on 6 ft. (1.8 m) of flexible tubing with ball valve.
- Electrical box can be remotely mounted up to 6 ft. (1.8 m).
- Rotatable blowers.
- Optional flow control automatically balances circulated water throughout the system.
- Optional Electric Heat.

## Specifications for AT-DC Series Air Handlers


## Dimensions

Model <sup>(1)</sup>	AT20C	AT20C	AT20C	AT180C	AT240C	AT360C
Nominal Capacity - Cool (BTU/h)	6000	9000	12000	18000	24000	36000
Nominal Capacity - Heat (BTU/h)						
Voltage @ 50/60Hz 1-Ph. (V)	230	230	230	518	518	230
Full Load Amps (FLA) Cool (A) <sup>(2)</sup>	1.4	1.4	3.2	3.9	3.9	3.9
Full Load Amps (FLA) Blower (A)	1.4	1.4	3.2	3.9	3.9	3.9
Optional Electric Heat (kW)	1	1	1.5	1.5	3	3
Heater Amps (A)	4.3	4.3	6.5	6.5	13	13
Max. Circuit Breaker (A)	5	5	5	5	5	5
Min. Circuit Ampacity (A)	2	2	4	5	5	5
Water Flow (gpm/lpm)	150.5	225/8.6	30/1.4	45/1.1	6/2.28	9/24.1
Air Flow (cfm/m <sup>3</sup> )	200/339.9	300/509.8	400/679.7	600/1019.5	700/1189.4	800/1359.3
External Static Pressure (inH2O/Pa)	2.9/72.1	2.8/69.7	2.6/64.7	2.1/52.9	1.4/34.8	0.5/12.5
Min. Height (in/mm) <sup>(3)</sup>	11.08/282	11.79/300	12.05/307	14.83/377	16.7/425	16.7/426
Max. Height (in/mm) <sup>(3)</sup>	13.63/347	13.73/349	13.94/355	16.94/431	16.7/425	19.74/502
Max. Depth (in/mm) <sup>(3)</sup>	14.81/377	14.48/419	18.75/477	20.08/511	22.48/571	26.41/671
Max. Depth (in/mm) <sup>(3)</sup>	14.27/363	14.55/370	14.49/369	14.83/377	16.42/418	17.15/436
Drain Connection Size (in)	1/2	1/2	1/2	1/2	1/2	1/2
Drain Connection Type	IPT	IPT	IPT	IPT	IPT	IPT
Chilled Water Connection Size (in)	1/2	1/2	1/2	1/2	1/2	1/2
Chilled Water Connection Type	IPT	IPT	IPT	IPT	IPT	IPT
Min. Supply Air Grille Size (sq.in./sq.cm)	5/127	6/153	6/153	7/178	8/204	8/204
Min. Return Air Grille Size (sq.in./sq.cm)	35/226	49/317	70/452	100/646	140/904	196/1265
Height-Electrical Box (in/mm)	70/452	98/633	130/839	200/1291	240/1549	360/2323
Width-Electrical Box (in/mm)	8/204	8/204	8/204	8/204	8/204	8/204
Depth-Electrical Box (in/mm)	6.13/156	6.13/156	6.13/156	6.13/156	6.13/156	6.13/156
	251	251	251	251	251	251

<sup>1</sup> AT indicates 250V. Add -FC for optional flow control; add -LX or -RX for valve position (relative to the blower side of the coil) and angle of the blower (-R0 is the default); add #kW for amount of optional electric heat in kilowatts.

<sup>2</sup> Blower amps will be reduced at lower speed/cfm or higher static pressure. Amps listed are at free air.

<sup>3</sup> All dimensions ± 0.30 in. (8 mm).

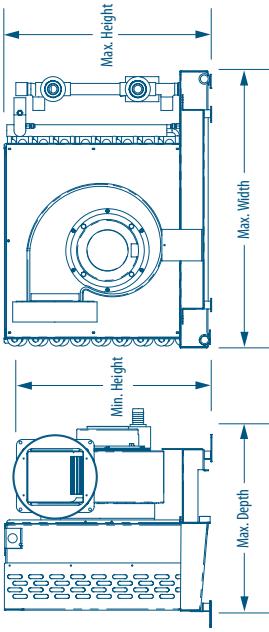

Dealer



Specifications and availability subject to change without notice.  
L-2426B Rev. 20120824

**DOMETIC MARINE DIVISION**  
2000 N. Andrews Ave. | Pompano Beach, FL 33069 USA | Tel: 954-973-2477 | Fax: 954-979-4414  
www.Dometic.com/Marine | MarineSales@DometicUSA.com

**24/7 TECH SUPPORT FOR UNITED STATES & CANADA:**  
8:00 AM to 5:00 PM Eastern Time: 800-542-2477  
After hours and weekends: 888-440-4494

**INTERNATIONAL SALES & SERVICES**

Europe & the Middle East: Call +44(0)870-330-6101  
For all other areas visit our website to find your nearest distributor.