

TWC Series Modular Chillers

Enclosed Modular Chillers with a Compact Footprint



Cruisair's TWC Compact is a high-performance, cost effective tempering unit. The reverse cycle TWC cools and heats, and is available in an expanded product range of 24,000 (2-ton) to 72,000 (6-ton) BTU/hr capacities. The three new models include 48,000 (4-ton), 60,000 (5-ton), and 72,000 (6-ton) BTU/hr units. Units can be multiplexed for even larger capacities as required.

Each unit includes a chilled water (CW) flow switch, refrigerant high- and low-refrigerant pressure switches, and inlet and outlet CW temperature sensors. The TWC does not include a chilled water modulating flow control, which means air handlers with or without flow controls can be used.* The brazed platecoil evaporator and coaxial cupronickel seawater condenser allow for superior cooling and heating performance.

On 2- to 3-ton units, an electrical box mounted on top of the chiller houses the control board as well as starting components, and can be mounted remotely up to 6 ft. (1.8 m) away. On 4- to 6-ton units, the electric box is normally contained within the enclosure and does not contribute to height. A remote electric box is available upon request for 4- to 6-ton units.

Two control systems are available. The standard control is our proven Digital Diagnostic Control (DDC) that provides simple, single-stage operation. For multiplexed systems, the Tempered Water Logic Control (TWLC) with LCD screen is available. Depending on the configuration, additional cables, switches, sensors, or a display may be required.

All TWC chillers come with R-410A, the preferred environmentally safe refrigerant used in modern, high-efficiency air conditioning systems.

*On larger boats we always recommend using flow-controlled air handlers to ensure proper water distribution. A balancing flow control (BFC) is not needed when using TWC chillers.



TWC modular chillers have a compact footprint and feature a fully enclosed design.


Key Benefits

- Compact, enclosed design.
- Reverse-cycle heating.
- High-efficiency rotary or scroll compressors.
- Includes flow switch, high- and low-pressure switches, and inlet and outlet circulated water temperature sensors.
- Large heat exchangers for superior performance in booth cooling and heating.
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant.
- Electrical box can be mounted remotely (TWCV24 and 36 models).


Specifications for TWC Series Modular Chillers

| Model ⁽¹⁾ | TWC024 | TWC030 | TWC036 | TWC048 | TWC060 | TWC072 |
|---|---|----------|----------|----------|----------|----------|
| Capacity (BTU/h) | 24000 | 30000 | 36000 | 48000 | 60000 | 72000 |
| Voltage (V) ⁽²⁾ | 220 | 380 | 220 | 230 | 220 | 230 |
| Cycle (Hz)/Phase (Ph) | 50/1 | 60/1 | 60/3 | 60/1 | 50/1 | 60/1 |
| Full Load Amps (FLA) Cool (A) | 9.5 | 3.5 | 9.1 | 10.3 | 7.2 | 12 |
| Full Load Amps (FLA) Heat (A) | 11.8 | 4.6 | 13.3 | 12 | 9.1 | 15.7 |
| Locked Rotor Amps (LRA) (A) | 63 | 45 | 96.7 | 63 | 73 | 105 |
| Max. Circuit Breaker (A) | 40 | 20 | 60 | 45 | 35 | 77 |
| Min. Circuit Ampacity (A) | 28 | 13 | 34 | 28 | 21 | 43 |
| Refrigerant Type | R410A | R410A | R410A | R410A | R410A | R410A |
| Height-Without Elec. Box (in/mm) ⁽³⁾ | 18.6/473 | 18.6/473 | 18.6/473 | 18.6/473 | 23.4/595 | 23.4/595 |
| Height-With Elec. Box (in/mm) ⁽³⁾ | 22.6/575 | 22.6/575 | 22.6/575 | 22.6/575 | 23.4/595 | 23.4/595 |
| Max. Width (in/mm) ⁽³⁾ | 13/331 | 13/331 | 13/331 | 13/331 | 13.3/338 | 13.3/338 |
| Depth-Drain Pan (in/mm) ⁽³⁾ | 18.8/478 | 18.8/478 | 18.8/478 | 18.8/478 | 18.8/478 | 18.8/478 |
| Max. Depth (in/mm) ⁽³⁾ | 19.4/493 | 19.4/493 | 19.4/493 | 19.4/493 | 23.9/608 | 23.9/608 |
| Seawater Inlet Connection (in/in) ⁽³⁾ | 5/16 | 5/16 | 5/16 | 5/16 | 1 1/32 | 1 1/32 |
| Chilled Water Connection Size (in) ⁽³⁾ | 1 | 1 | 1 | 1 | 1/4 | 1/4 |
| Chilled Water Connection Type | HB | HB | HB | HB | FPT | FPT |
| 1 | Add a 'C' for 230V/60Hz/1-Ph, 'CK' for 220-250V/50Hz/1-Ph, 'EC' for 460V/60Hz/3-Ph, or 'EC' for 380V/50Hz/3-Ph. For example, TWC072D/C = 230V/60Hz/3-Ph/unit. | | | | | |
| 2 | For information about voltages not shown in this sheet, please contact Dometic Marine sales at 954-973-2477. | | | | | |
| 3 | All dimensions \pm 0.30 in. (8 mm). | | | | | |

Dimensions

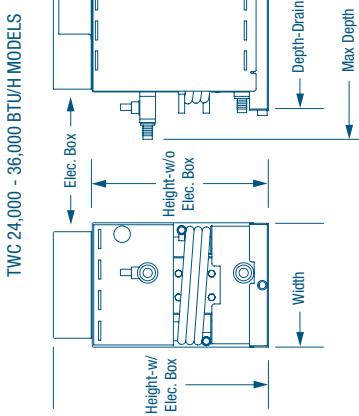

TWC 48,000 - 72,000 BTU/H MODELS

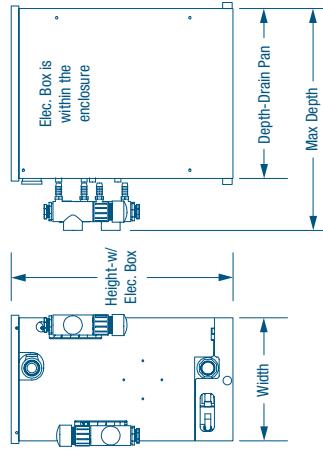

TWC 24,000 - 36,000 BTU/H MODELS

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. | Pompano Beach, FL 33069 USA | Tel: 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

L-2430 Rev. 20130510



Assembled in the USA

Environmentally
Responsible

Dealer

Specifications and availability subject to change without notice.